

## GHK-10OP-NA

### FEATURES

- SVGA (800 x 600) (230 cd/m2)
- VGA & DVI Signal Input
- OSD Control on the Back Side
- DC 12V Power Input
- Integrated Industry-Standard Design
- Support Embedded Mounting



RoHS



10.4  
Inch  
TFT




WT

OEM  
ODM

## PRODUCT SPECIFICATIONS

LCD	
Panel Type	AU LCD Panel (Optional)
Resolution (pixel)	800*600
Display Area (mm)	211.2(H)x158.4(V)
Brightness (nit)	230nit / 400nit (Optional)
Contrast Ratio	500:1
Colors	16.2M
View Angle (U/D/L/R)	55/65/70/70
Backlight Lifetime	30000hrs
OSD Control	Auto Menu Select (+,-) Exit On/Off
Touch Screen	
Type	NO(Optional)
Resolution(pixel)	NO
Transmittance	NO
Interface	
Signal Input	VGA+DVI ( 15 Pin D-sub/DVI-D Connector ) AV Input / Video Input /Audio Input (Optional)
Touch Connectors	USB / RS232(Optional)
Power	
Power Input	DC-in 12V=4A (50~61HZ)-DC Jack (2.0mm) & 3-PIN Industrial Connectors
Power Consumption	≤48W
Mechanical	
Material	High Strength Cold Rolling Steel Chassis
Mounting	Support Embedded Mounting
Dimensions	260(H) x 222(V) x 33(D)
Environment	
Operating Temp	-20~70C°
Storage Temp	-30~80C°
Relative Humidity	10~90% @40C° Non-condensing without touch screen
Vibration	1G peak,5~500Hz(Random)
Shock	15G peak acceleration (11msec.duration)
Rating	Facilitate installation of the demolition, solid portfolio
Ordering Information	
GHK-10OP-NA	10.4"Open Frame Monitor with VGA/DVI input and power adapter (800*600 / 230nit)
GHK-10OP-TA	10.4"Open Frame Touch Monitor with 4 wire resistive touch screen,VGA/DVI input (800*600 / 400nit)

## DIMENSIONS

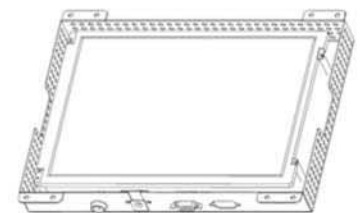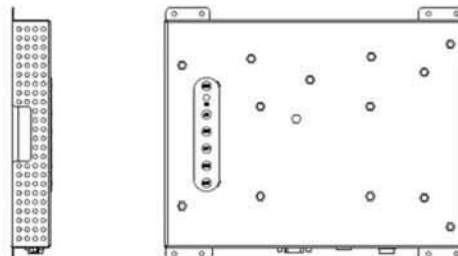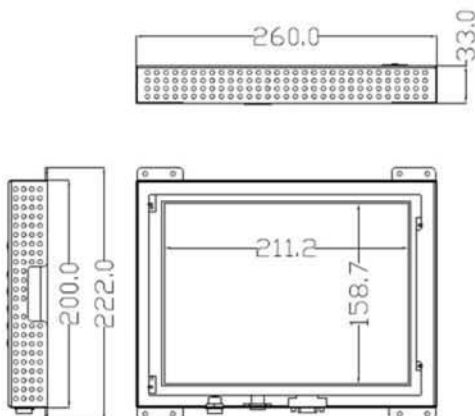

### I / O PORT

