

GHK-17OP-NA

FEATURES

- SVGA (1280 x 1024) (350 cd/m2)
- VGA & DVI Signal Input
- OSD Control on the Back Side
- DC 12V Power Input
- Integrated Industry-Standard Design
- Support Embedded Mounting



RoHS



17 inch
TFT



WT

OEM
ODM

PRODUCT SPECIFICATIONS

LCD	
Panel Type	AU LCD Panel (Optional)
Resolution (pixel)	1280*1024
Display Area (mm)	337.920(H)x270.336(V)
Brightness (nit)	250nit /350nit (Optional)
Contrast Ratio	1000:1
Colors	16.7M
View Angle (U/D/L/R)	85/85/85/85
Backlight Lifetime	50000hrs
OSD Control	Auto Menu Select (+,-) Exit On/Off
Touch Screen	
Type	NO
Resolution(pixel)	NO
Transmittance	NO
Interface	
Signal Input	VGA+DVI (15 Pin D-sub/DVI-D Connector) AV Input / Video Input /Auoio Input (Optional)
Touch Connectors	NO
Power	
Power Input	DC-in 12V=4A (50~61HZ)-DC Jack (2.0mm) & 3-PIN Industrial Connectors
Power Consumption	≤48W
Mechanical	
Material	High Strength Cold Rolling Steel Chassis
Mounting	Support Embedded Mounting
Dimensions	338.0(H) x 330.0(V) x 47.5(D)
Environment	
Operating Temp	0~50C°
Storage Temp	-20~60C°
Relative Humidity	10~90% @40C° Non-condensing without touch screen
Vibration	1G peak,5~500Hz(Random)
Shock	15G peak acceleration (11msec.duration)
Rating	Facilitate installation of the demolition, solid portfolio
Ordering Information	
GHK-17OP-NA	17"Open Frame Monitor with VGA/DVI input and power adapter (NO Touch,250nit)
GHK-17OP-TA	17"Open Frame Touch Monitor with 5wire resistive touch screen,VGA/DVI input (350nit)

DIMENSIONS

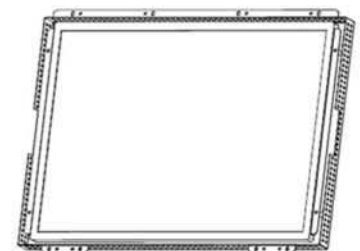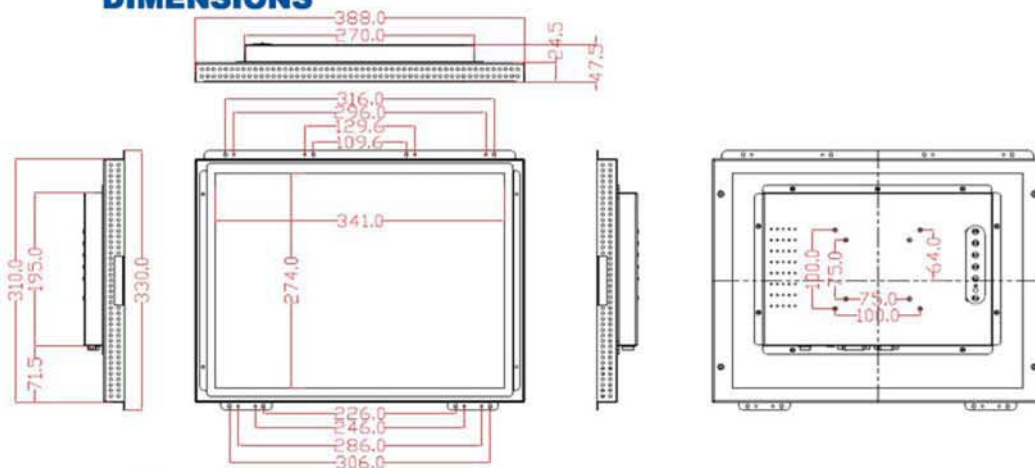

I / O PORT

